

ÜRÜN KATOLOĞU

Product Catalogue



HAKKIMIZDA

1989 yılında kurulmuş olan firmamız; Konya’da 4000 m² kapalı alan üzerine kurulu üretim tesislerinde 50 kişilik deneyimli kadrosu ve birçok ülkede bulunan bayii ağı ile, her türlü değirmen ve yem makinaları imalatı alanında faaliyet göstermekte, müşterilerine un ve irmik üretim tesisleri konusunda anahtar teslim çözümler sunmaktadır.

Firmamız, kurulduğu yıllardan itibaren sürekli olarak kendini yenilemiş, makine parkurunu CAD-CAM destekli CNC tezgahlarıyla zenginleştirmiştir. Ayrıca ileri teknoloji üretim standartlarında üretilen makina ve sistemlere %100 kontrol uygulamak suretiyle hata payını sıfıra çekmektedir.

Bunların yanı sıra makinaların hatasız ve en hızlı biçimde boyanmasına imkan verecek son teknoloji bir boya ünitesini, hızlı ve etkili üretim sistemine uyum sağlayacak ve müşteriye hızlı yedek parça tedarikine olanak verecek modern ve ergonomik bir yedek malzeme deposunu işletmeye alarak, bugün itibariyle geldiği noktada ürünlerini dünyanın 32 ülkesine ihraç eder hale gelmiştir.

ABOUT US

Our corporation was established in 1989 and has been carrying on its production on 4000 m² field in Konya with its 50 person experienced staff and with franchising network in many countries offer-ing turn-key solutions to the customers on flour and semolina production plants.

Our company is continually renewed itself since it was established, supported by CAD-CAM CNC lathes machine course enriched. In addition, advanced technology, produc-tion-class machines and systems that produced the margin of error to zero by applying the %100 attract control.

In addition, accurate and fastest machines to allow the painting to a paint unit in the latest tech-nology, adapting to rapid and efficient production system and supply of spare parts to customers that will allow rapid spare parts store, a modern and er-gonomic operation, taking the world as of today its products at the point where is exported to 32 coun-tries have become

MİSYONUMUZ / MISSION

Özunmak Değirmen A.Ş misyonu ; müşteri memnuniyetine odaklanarak ülkemizin rekabet gücünü ve refahını arttırmak sürekli kılmak,uluslararası markalarla rekabet edebilen,ürün ve hizmetlerinde kaliteden ödün vermeyen,topluma ve çevreye katkı sağlayan bir grup olmak, ulusal önceliklerimiz doğrultusunda bilim ve teknoloji politikaları geliştirmek,bunları gerçekleştirecek altyapı ve araçları oluşturmaya katkı sağlamak,a-raştırma ve geliştirme faaliyetlerini desteklemek ve yürütmek,bilim ve teknoloji kültürü oluşturmakta öncü rol oynamaktır.

Mission of Ozunmak Degirmen A.S is to increase competition power and affluence and to be a group which can compete,does not compromise from quality at goods and serve and to develop science and techmology poli-cies and to build possibilities to realize all and supporting of searching and development,improving activities and to take role for them.

VİZYONUMUZ / VISION

Toplumumuzun yaşam kalitesinin artmasına ve ülkemizin sürdürülebilir gelişmesine hizmet eden , bilim ve teknoloji alanlarına yenilikçi,yönlendirici, katılımcı ve paylaşımcı bir kurum olmaadır.

Vision of Ozunmak Degirmen A.S,To be a company which causes to inrcrease life quality of our people,developed of our country,innovative at science and technology,forwarder and partaker.





öz ÇEKİÇLİ DEĞİRMEN
HAMMER MILL
ДРОБИЛКА



The product which is using in many sector is used to shrink and break the grain materials incoming to the machine with desired sizes and makes ready to use. Desired capacity of product incoming with the feeder on it.

With the motor connected directly to the body, it continues the crushing process until it passes through the holes of the steel cage through the high speed rotation of the rotor with the help of blades.

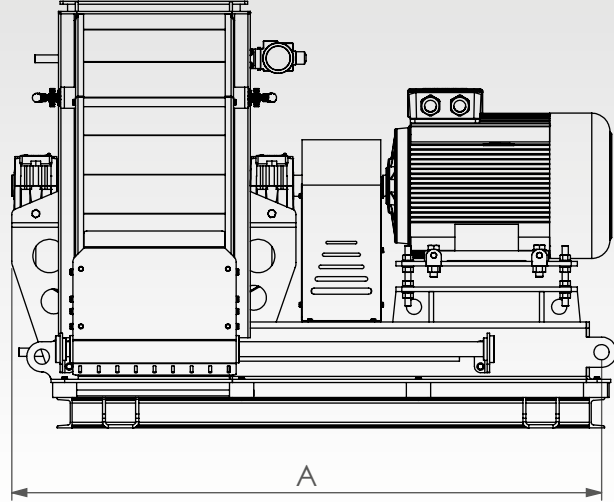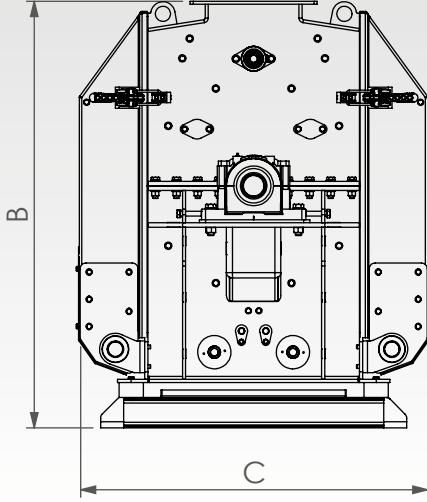


Model	A	B	Bmax	C	D	E	F	G	H
ÖZ-HM 45x37	1430	625		750	1370	360	130	240	
ÖZ-HM 70x40	1635	960	1620	1295	1525	730	445	180	
ÖZ-HM 115x50	2435	1775	2495	1800	2410	1590	490	350	285
ÖZ-HM 115x60	2540		2650		2515		595		
ÖZ-HM 115x80	2805		2800	1800	2760		790		
ÖZ-HM 115x100	3265		3065	1840	3195	1620	1050		
ÖZ-HM 115x120	3460		3265		3390		1245		

Model	Bıçak Adedi	Elek Ölçüleri				Motor kW	Ağırlık	Kapasite
		Çap	Genişlik mm	Adet	Net Alan m2			
ÖZ-HM 45x37	48	450	380	2	0.36	18,5	490	2
ÖZ-HM 70x40	64	700	400		0.7	37/45	1040	5-6
ÖZ-HM 115x50	80	1150	500		1.4	90/110	4520	42278.00
ÖZ-HM 115x60	96		600		1.7	110/132	4740	15-20
ÖZ-HM 115x80	128		800		2.2	160/200	5170	20-25
ÖZ-HM 115x100	160		500	4	2.8	200/250	6810	30-35
ÖZ-HM 115x120	192		600		3.3	250/315	7030	45-50

öz **KIRICI BESLEME ve MIKNATIS**
HAMMER MILL LOADING & MAGNET
ДРОБИЛЬНЫЙ ФРЕЗЕР



Screw conveyors rotating in opposite directions provide product blending and metering into the mill at a constant and uniform rate. Feeding rate that automatically adjusts with the ampere load on the mill motor (available in automated plants). Permanent magnet captures ferrous metals prior to milling.

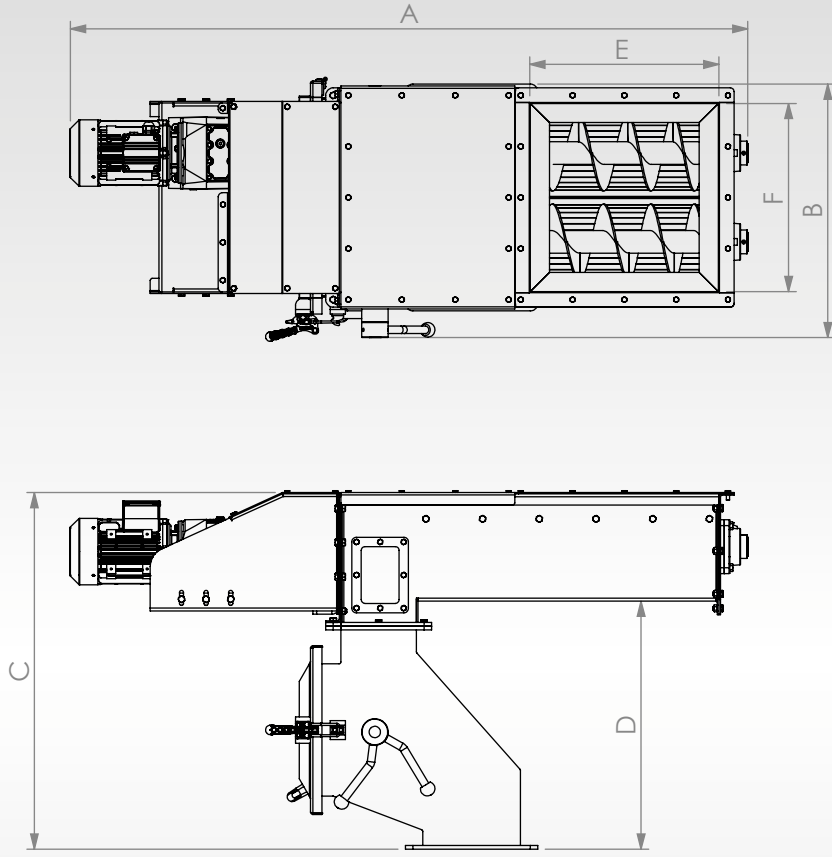



Type	Dimensions (mm)					
	A	B	C	D	E	F
ÖZ-LM-10	1800	670	945	650	500	500






It provides a homogenous mixing of the products entering. The product is mixed for the desired time with the help of pneumatic clapes located at the product inlet and outlet.

The products entering in collective are mixed with the specially designed rotor. Fountain designed to spray oil and molasses reach each area of the mixer.

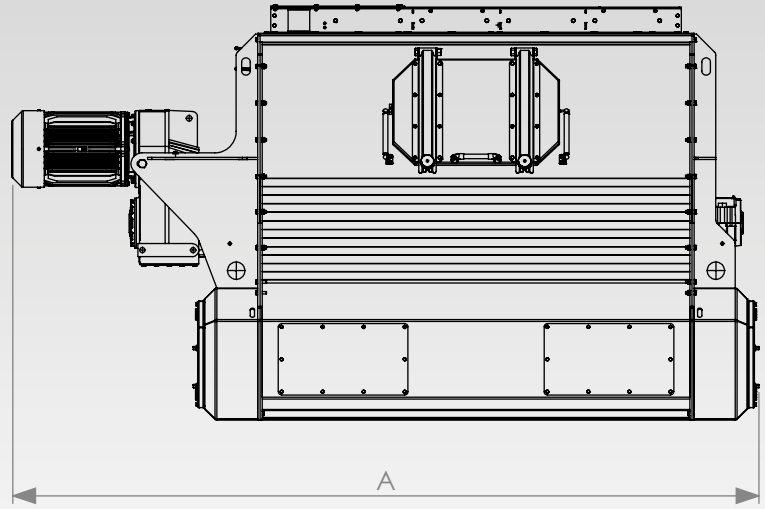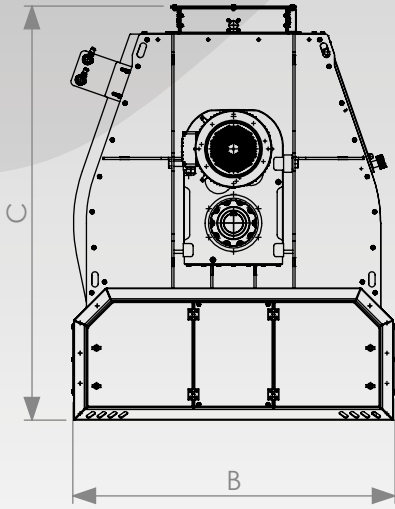



Model	A	B	C	D	F	G	H
ÖZ-MX-R 500	3125	1175	1665	2145	900	1500	845
ÖZ-MX-R 1000	3850	1475	1800	2955	950	1575	1060
ÖZ-MX-R 2000	3910	1890	2280	3195	1350	2005	1390

Model	Motor	Hacim m3	Ağırlık
ÖZ-MX-R 500	11	1	1595
ÖZ-MX-R 1000	15	2	2265
ÖZ-MX-R 2000	30	4	3820

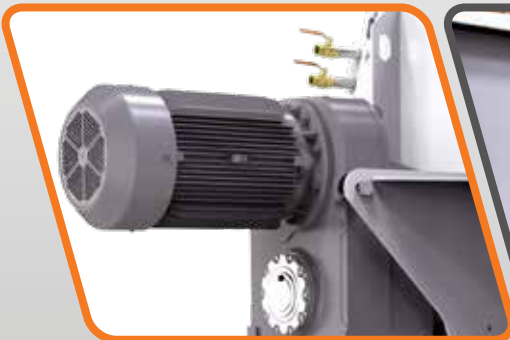



It is used in areas where sensitive weighing is required in feed factories.

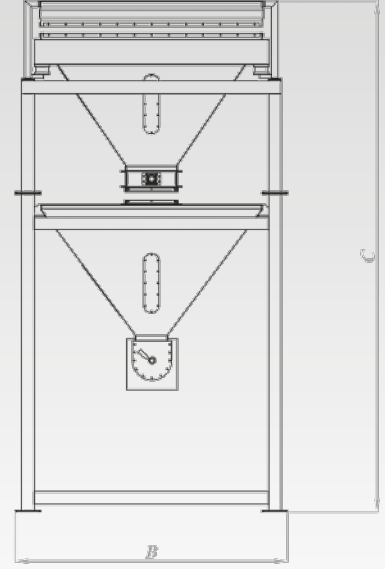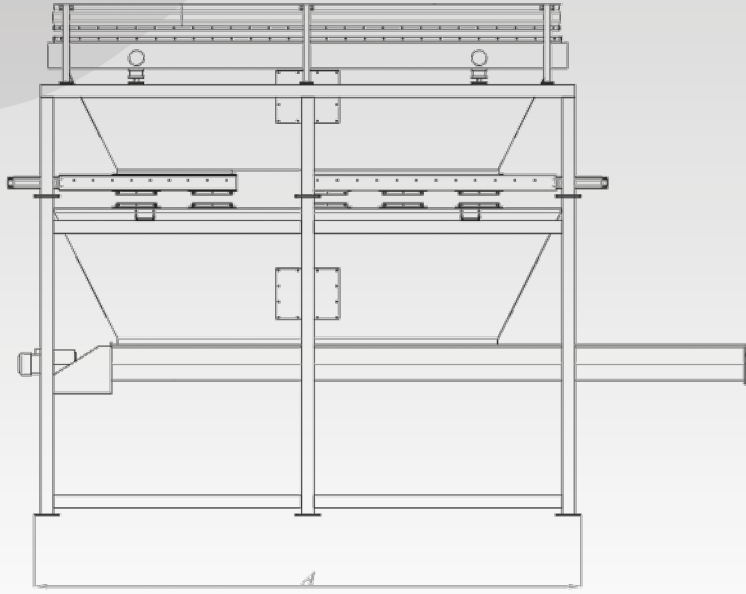

Model	A	B	C	D	F	G	H	I
ÖZ-DZ-095	2753	1413	1861	1008	1490	371	876	220
ÖZ-DZ-223	2755	1780	5265	1835	3720	1545	1250	280
ÖZ-DZ-467	4350	1930	5320	1970	3660	1660	2690	
ÖZ-DZ-715	5050	2130	6305	2175	4070	2235	3490	270



Model	Kefe Hacmi m3	Ağırlık
ÖZ-DZ-095	0.95	800
ÖZ-DZ-223	2.23	2320
ÖZ-DZ-467	4.67	3240
ÖZ-DZ-715	7.15	3500



öz **MELASİYER**
MOLASSES MIXER
МЕЛАС-СМЕСИТЕЛЬ



Molasses mixers are used in feed mills for the mixing of cane molasses, beet molasses and corn sugar molasses. It is possible to add up to 10 % of molasses into the molasses mixer.

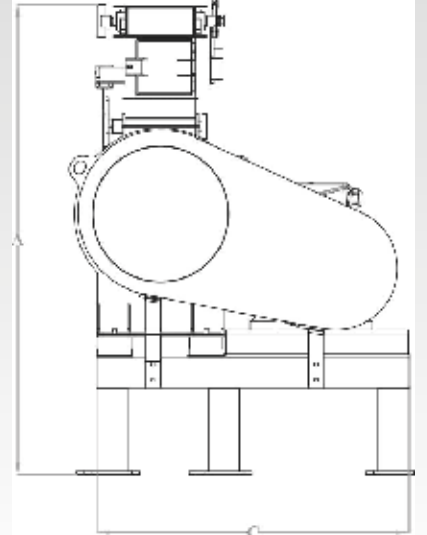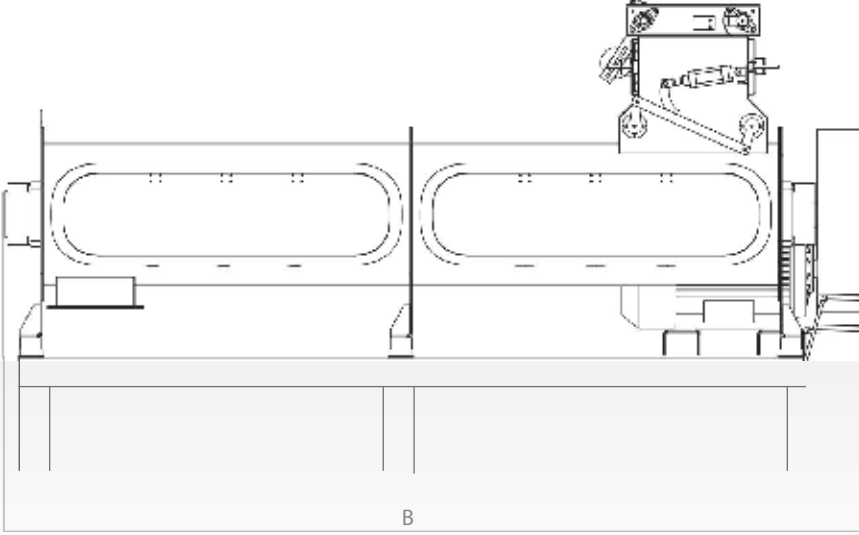

Model	A	B	C	D	E	F	G	H	I	J	K	L	MxN
ÖZ-ML 300	1730	1285	1235	2555	1210	1130	590	645	450	180	145	145	160x150
ÖZ-ML 450	2850	1400	1785	3765	2135	1270	910	875	690	170	250	500	275x280
ÖZ-ML 550	3355	1605	1935	4245	2460	1430	1060		890	220		570	260x315
ÖZ-ML 600	3755	1630	2030	4665	2720		1110	920	1245	320		620	300x365

Model	Ana Motor	Besleyici Motor	Kapasite	Rotor Çapı	Ağırlık
ÖZ-ML 300	7.5	0.75	2	300	595
ÖZ-ML 450	11	1.5	5	450	1415
ÖZ-ML 550	22	2.2	10	550	1875
ÖZ-ML 600	30	3	20	600	2205




PELET PRESİ
PELLET PRESS
ПЕЛЛЕТНЫЙ ПРЕСС



It provides to get final product with different sizes by combining and compressing different materials such as main feed. Fuel and food materials. It is manufactured in 3 stages as feeder. Mixer and Press and made from steel construction. Capacity that is desired to be given the product with feeder can be adjusted accordingly.


Product is tranfered to the pres section with the help of specially hardened anchors into the mixers with steam (if required with molasses). It is made from stainless metal to prevet corosion to the parts where the steam and molasses passes.

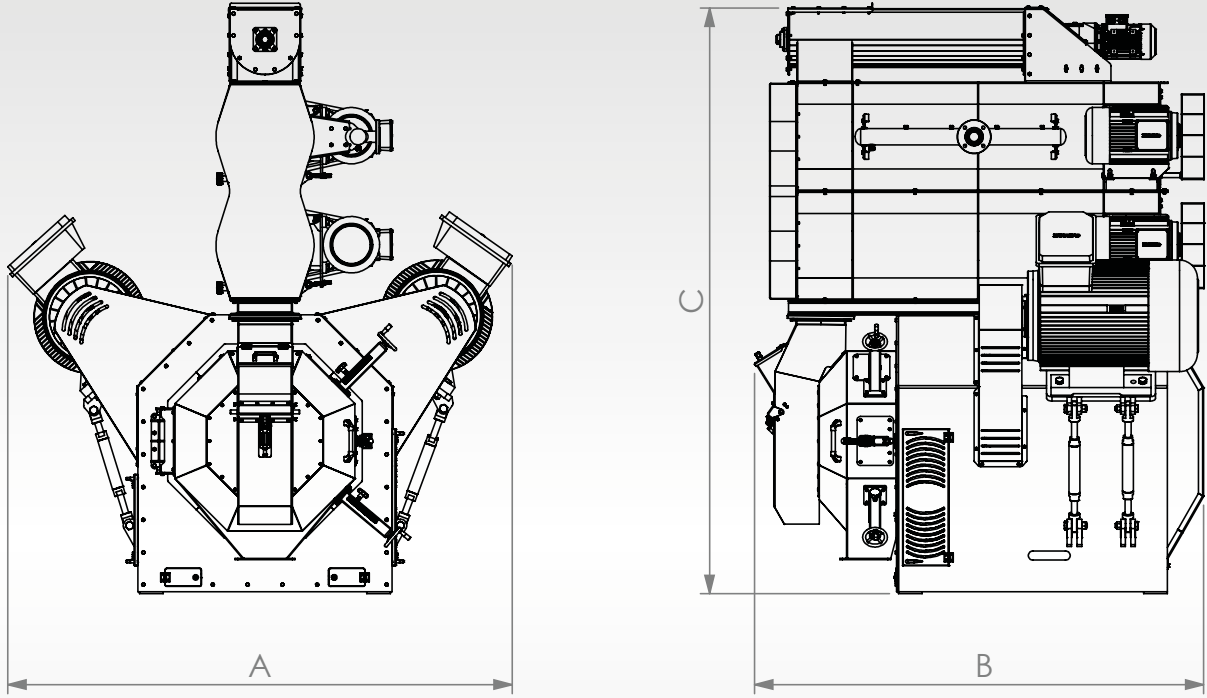


Model	A	B	C	D	E	F	G	H	I
ÖZ-PP 350	1555	2175	1255	1020	1950	190	190	240	310
ÖZ-PP 420	1890	2180	1585	1000	995	235	235	310	365
ÖZ-PP 520	2410	2890	2150	1300	1250			300	300
ÖZ-PP 660	2575	3150	2090	1400	1400			400	400
ÖZ-PP 800	2790	3340	2740	1550	1880	300	300	460	520
ÖZ-PP 900	2990	3385	2900		1980			490	

Model	Disk			Rulo		Motor	Ağırlık
	İç Çap mm	Pelet Genişliği mm	Pelet Alanı m3	Adet	Çap		
ÖZ-PP 350	350	100	0.11	2	160	75	2400
ÖZ-PP 420	420	138	0.18		200	2x(45/55)	3495
ÖZ-PP 520	520	178	0.29		240	2x(90/110)	6450
ÖZ-PP 660	660	228	0.47		320	2x(110/132)	7890
ÖZ-PP 800	800	265	0.67		360	2x(132/160)	11525
ÖZ-PP 900	900		0.75		420	2x(160/200)	12585
ÖZ-PP 900		300	0.85			2x(200/255)	13015

PELET PRESİ
PELLET PRESS
ПЕЛЛЕТНЫЙ ПРЕСС

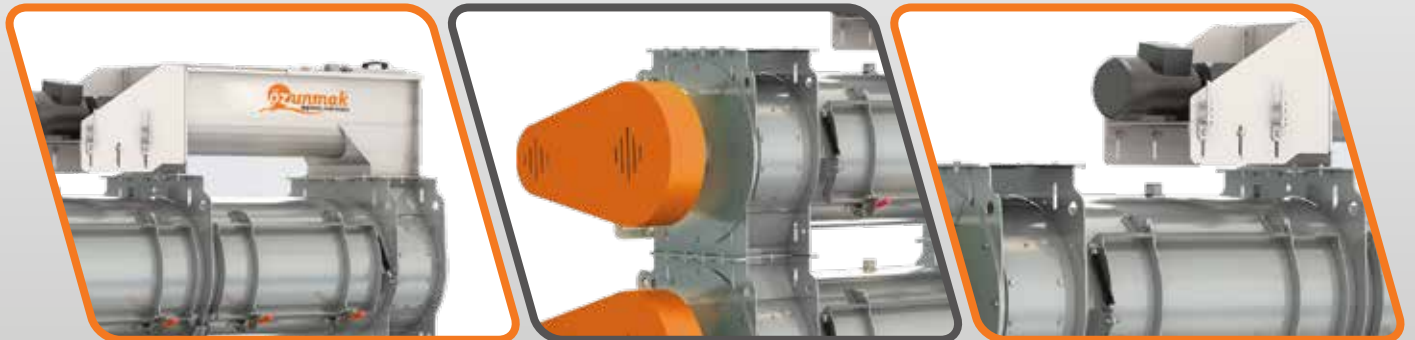


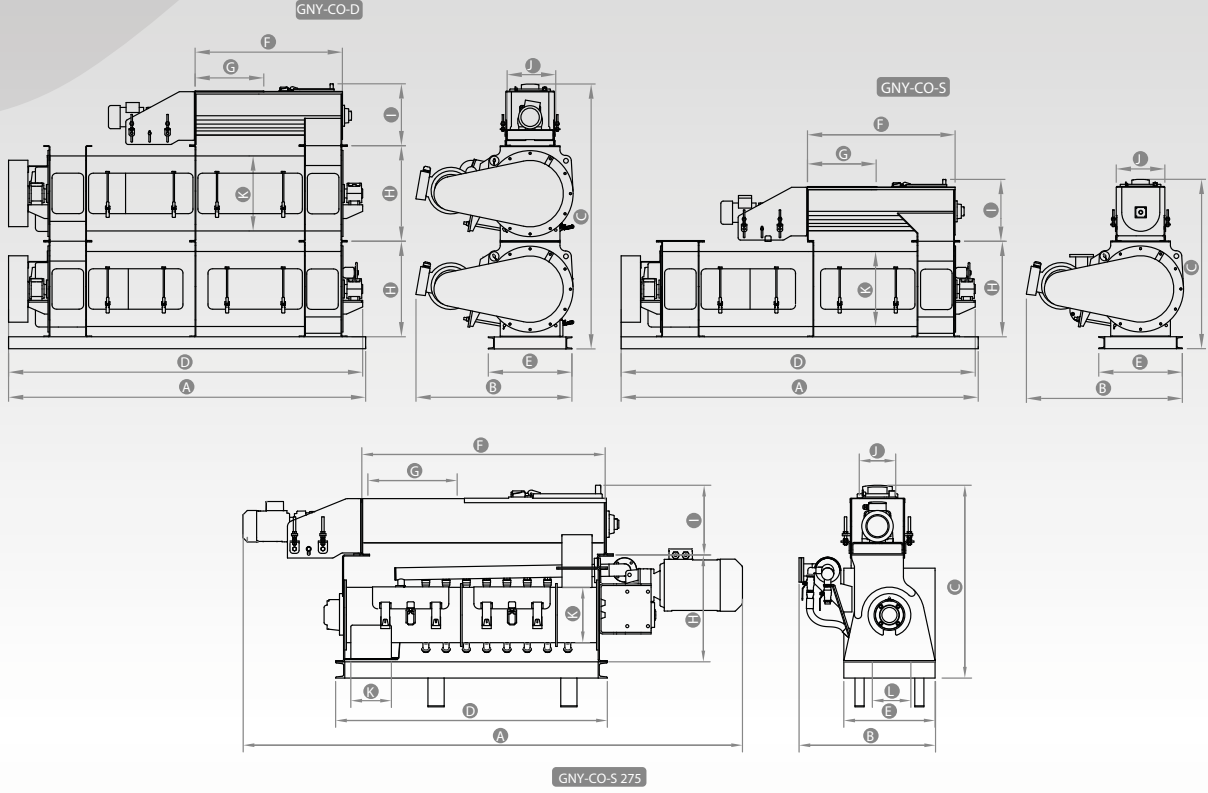


Model	A	B	C	D	E	F	G	H	I	J	QK	K	L
ÖZ-CO-S 275	2460	680	950	1340	450	1200	440	530	345	180	-	192	192
ÖZ-CO-S 450	3425	1080	1200	2780	1290	480	650	450	270	470	-	-	
ÖZ-CO-S 600	3390	1240	1420	3365	700	1430	500	800	520	320	620	-	-
ÖZ-CO-D 450	3425	1080	1850	2780	450	1290	480	650	450	270	470	-	-
ÖZ-CO-D 600	3390	1240	2220	3365	700	1430	500	800	520	320	620	-	-

Model	Ana Motor	Besleyici Motor	Rotor Çapı	Ağırlık
ÖZ-CO-S 275	5.5	0.75	255	375
ÖZ-CO-S 450	11	2.2	450	975
ÖZ-CO-S 600	18.5	3	600	1470
ÖZ-CO-D 450	2x11	2.2	450	1550
ÖZ-CO-D 600	2x18.5	3	600	2435



It is used in the food and feed industry to cool particulate and granular materials. It provides effective cooling with the reverse air flow vertical cooling principle. Easy to install, energy saving is high.

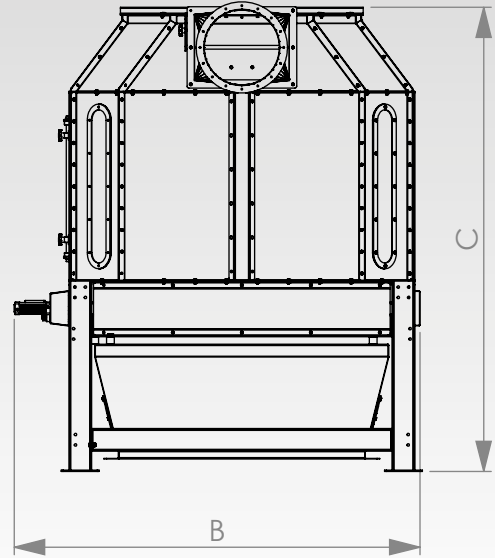
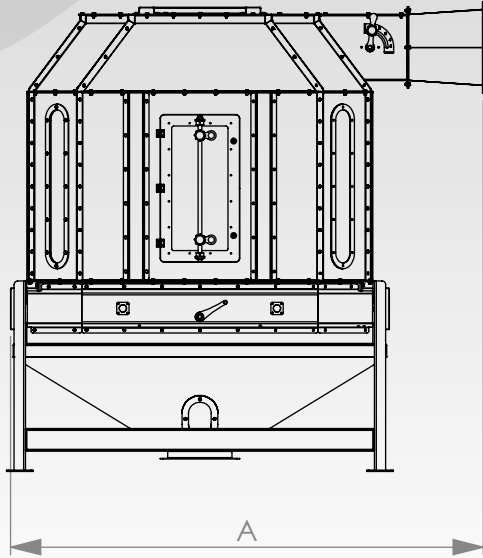


Model	A	B	C	D	E	F	G	H	I	J	K	L	QM	Ağırlık
ÖZ-CL-S 1360x1360	1895	1725	2220	1550	1445	1445	700	225	225	430	425	345	-	670
ÖZ-CL-S 1400x1400	2505	1770	2745	1995			1150	-	220	220	1025	200	500	1130
ÖZ-CL-D 1400x1400	2555		3640				700	900						1900
ÖZ-CL-S 1900x1900	3000	2270	3320	2495	1915	1915	1400	-	300	300	1275	250	650	1660
ÖZ-CL-D 1900x1900	3050		4270				800	1100						2720
ÖZ-CL-S 2250x2250	3395	2620	3540	2845	2265	2265	1400	-	400	400	1525	1010	800	2050
ÖZ-CL-D 2250x2250	3375		4985				1000	1400						3435
ÖZ-CL-S 3000x3000	4090		3600				4340						3375	3020





The goods taken from the feeding spiral are distributed equally between the rolls. The rolls are adjusted according to the desired grain size and the goods are broken. Depending on the capacity, crushing process is carried out with rolls in 1-3 layers.

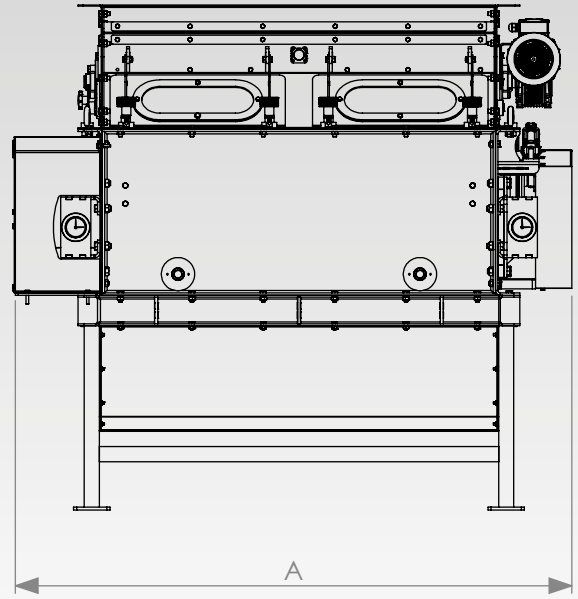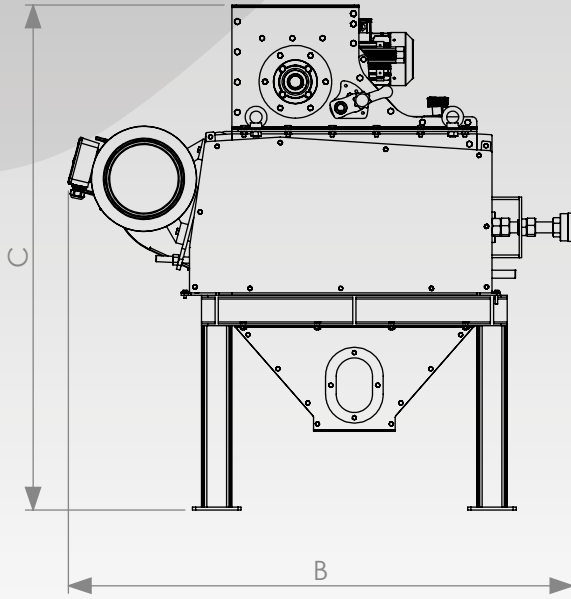

Model	A	B	C	D	E	F	G	H	I
ÖZ-GR-S 25x100	1675	1615	1375	1225	875	1025	300	570	270
ÖZ-GR-S 30x100		1665			925				1275
ÖZ-GR-S 30x125	1925			1475		925		820	
ÖZ-GR-S 30x150	2175				1725			1900	1070
ÖZ-GR-D 30x150		2345		1975		1525			600


Model	Ana Motor	Motor	Kapasite	Ağırlık	Top Çapı mm	Top Boyu mm
ÖZ-GR-S 25x100	11	0.75	8-10	1980	250	1000
ÖZ-GR-S 30x100	15		10-14	2055		1250
ÖZ-GR-S 30x125			13-18	2355		
ÖZ-GR-S 30x150			14-20	2680		
ÖZ-GR-D 30x150	2x15	2x0.75	28-40	5535		



öz ÇÖP SASÖRÜ
SEPARATOR
ВИБРАЦИОННЫЙ ГРОХОТ



It is used in the process of separating the grain from foreign material such as straw. Spike and soil which are different according to the line dimensions. The machine has 2 sieves designed with adjustable vibration and inclination all made of steel construction. Rubber ball placed to prevent clogging of sieves. The slopes and vibrations of the sieves can be adjusted thanks to the weights.

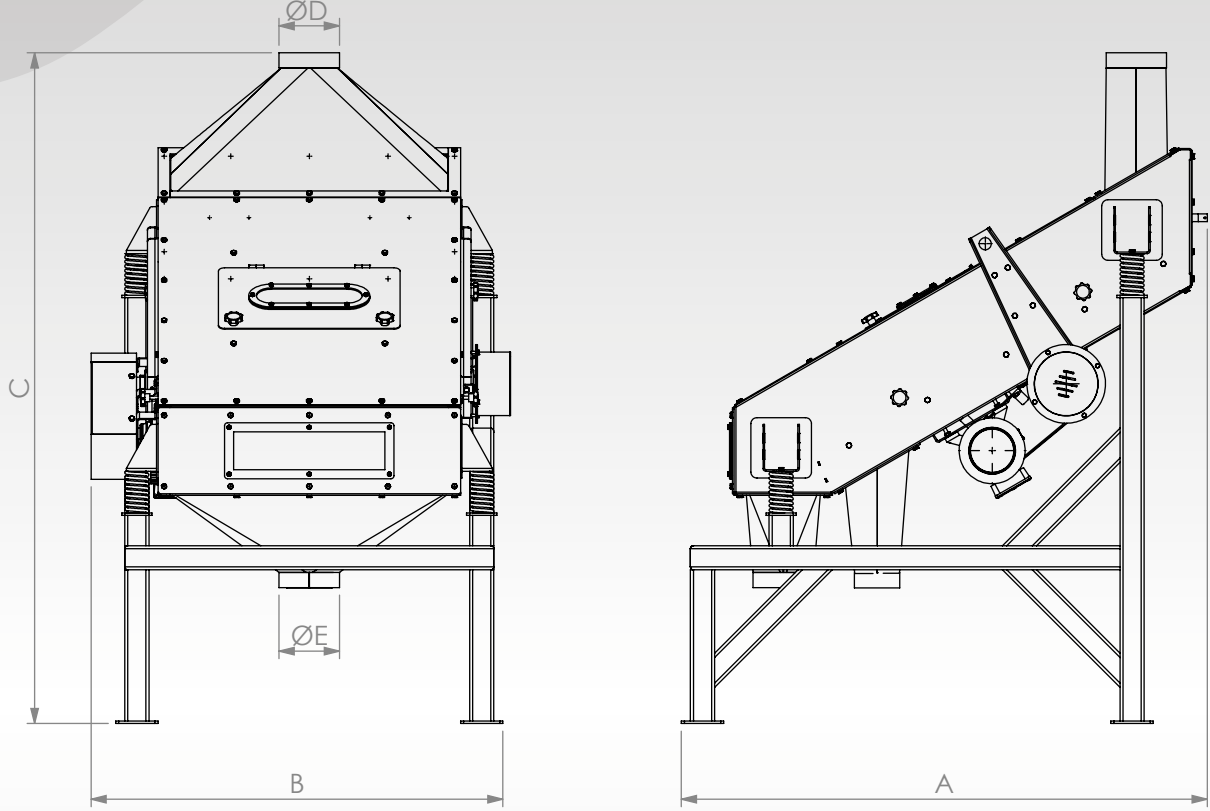

Model	A	B	C	D	E	QF	QG	QH	QJ
ÖZ-GS 100x150	2160	1590	1760	560	350	200	200	250	120
ÖZ-GS 100x200	2750	1615	1975	600		180	250		
ÖZ-GS 150x200		2115	2360	605	550	250	300		


Model	Elek Ölçüleri		Kapasite	Ağırlık	Motor	Strok	Eleme Alanı
	En	Boy					
ÖZ-GS 100x150	1	2x0.75	10-15	860	2x0.45	4.5-5.5	1.5
ÖZ-GS 100x200		2x1	20-25	1015	2x0.9		2
ÖZ-GS 150x200	1.5		35-40	1520	2x1		3



öz HAVA KİLİDİ
AIR LOCK
ЗАБЛОКИРОВАНО




It is used to separate air from the product, which is discharged from a cyclone separator into pneumatic systems. It is installed underneath the cyclone separators and air filters. It works with the negative pressure as well as an air seal against leakage.

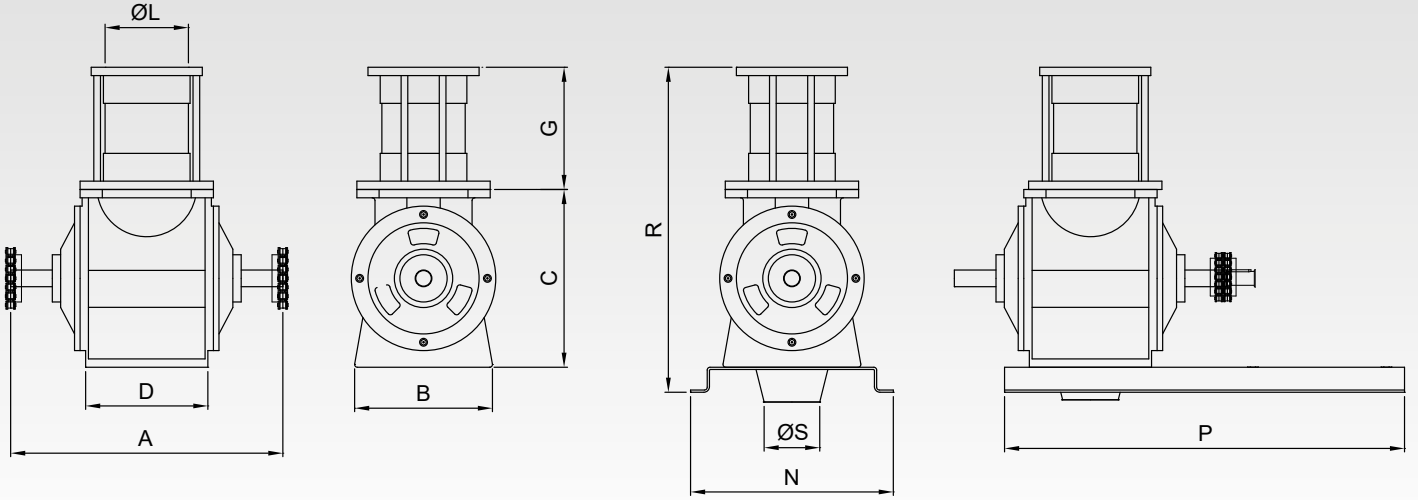

Model	A	B	C	D	E	F	G
ÖZ-HK 220	485	470	335	290	290	220	220
ÖZ-HK 300	615	545	450	370	290	300	300
ÖZ-HK 400	715	545	550	490	490	400	400

Model	Motor	Devir	Ağırlık
ÖZ-HK 220	0.55	55-75	45
ÖZ-HK 300	0.75		95
ÖZ-HK 400			145

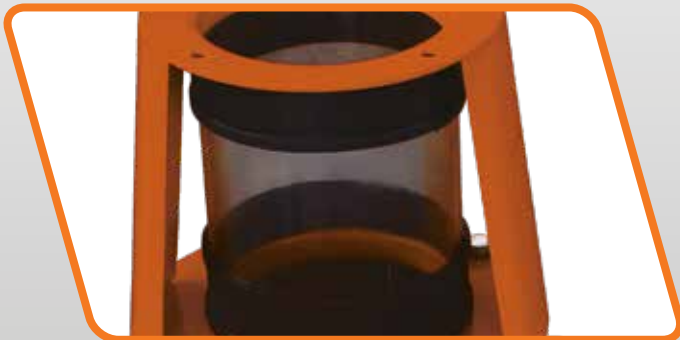




25-50 KG TEK TARTIM TEK BOŞALTIM YEM PAKETLEME
25-50 KG SINGLE WEIGHING SINGLE DISCHARGE FEED PACKAGING
ТОРЖЕННАЯ ШКАЛА



Capacity Information: It may vary according to the product to be bagged and the desired tolerance. Information will be given for capacity information according to product and tolerance.

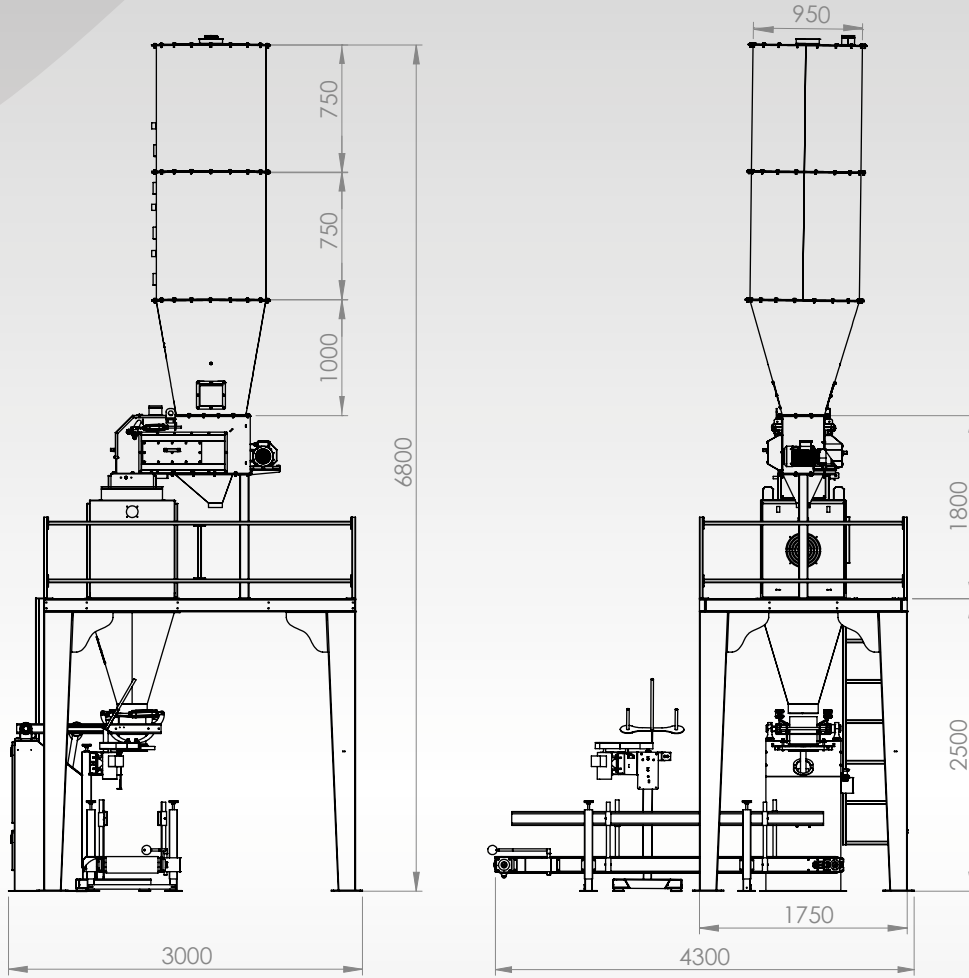




Model	A	B	C	D	E	F	G	H
ÖZ-DC-S	1284	5500	2992	3700	914	4456	2810	1992
ÖZ-DC-D	1575	6000	3000	3650	1574	3358	2710	2500

Model	A	A1	B	B1	C	DxL	E	F	G	Kapasite
ÖZ-DC 300x160	930	345	775	390	420	200x200	620	880	395	10
ÖZ-DC 300x220						220x240			435	25
ÖZ-DC 400x280	1365	475	785	520	520	280x320	880	980	520	60
ÖZ-DC 600x340	1715	600	1475	780	570	300x380	1130	1290	610	120
ÖZ-DC 700x400	1795	590	1785	910	420	310x445	1290	1380	680	150
ÖZ-DC 700x480	1855	675	1815		455	340x520	1280	1390	455	190

PREMIX
PREMIX DOSAGE
ДОЗИРОВКА ПРЕМИКСА



It is used to store the ingredients (vitamins, Enzymes, Salt, Etc.) Required to form the product and make it ready for production. Tube screw conveyor coils which operate independently of one another. Transmit the products to the dosing scales respectively. When the recipe is completed. It is mixed with semi-finished products. Eliminates human errors that can occur in manual feeds and accelerates production.

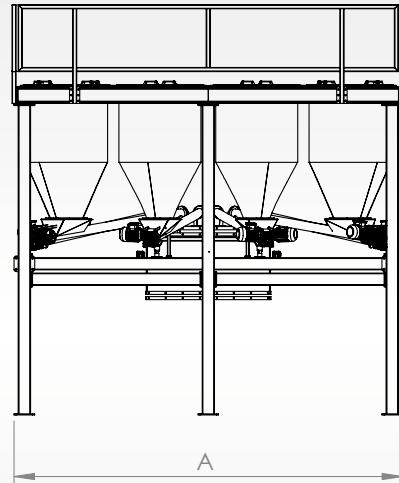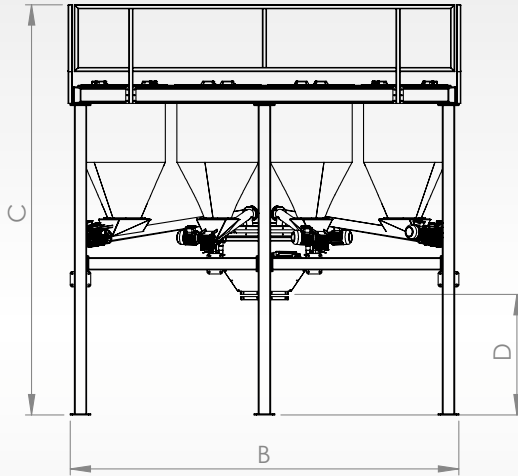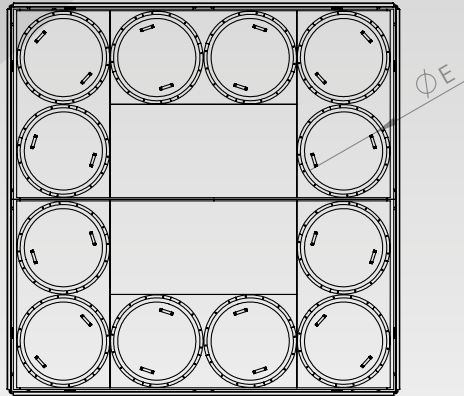


Type	Dimensions (mm)				ØE
	A	B	C	D	
ÖZ-PR-8	1850	1850	4200	1580	550
ÖZ-PR-12	2400	2400	4200	1580	550



öz **ELEVATÖR**
BUCKET ELEVATOR
ЛИФТ



The whole body is fabricated from steel sheet. Because of international safety regulations, inspection and installation covers should only be opened by suitable tools. The driven system is designed to move only in one direction. Reverse movement isn't permitted. For special applications, mostly worn surfaces are supported (covered) with replaceable plates. Drive selection; With direct-coupled reducer motor With chain or belt-pulley driven reducer system.

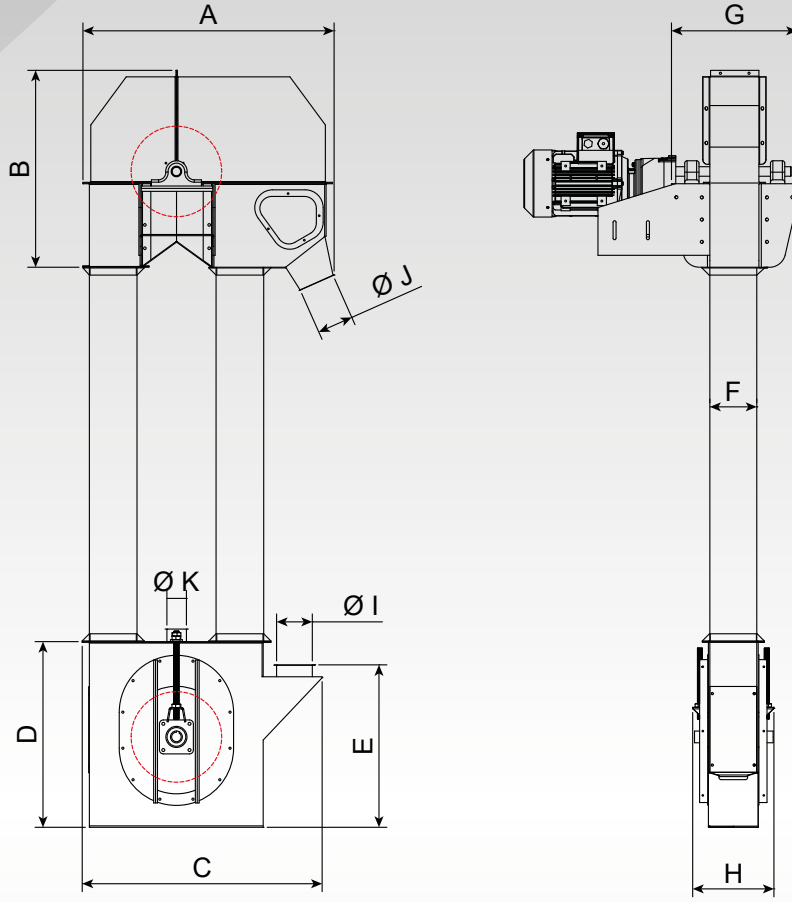

Model	A	A1	B	B1	C	DxL	E	F	G	Kapasite
ÖZ-EL 300x160	930	345	775	390	420	200x200	620	880	395	10
ÖZ-EL 300x220						220x240			435	25
ÖZ-EL 400x280	1365	475	785	520	520	280x320	880	980	520	60
ÖZ-EL 600x340	1715	600	1475	780	570	300x380	1130	1290	610	120
ÖZ-EL 700x400	1795	590	1785	910	420	310x445	1290	1380	680	150
ÖZ-EL 700x480	1855	675	1815		455	340x520	1280	1390	455	190




öz ZİNCİRLİ KONVEYÖR
CHAIN CONVEYOR
ЦЕПНОЙ КОНВЕЙЕР



Palette conveyor is used to transport dampened wheat horizontally. Palette conveyor are used to carry dampened wheat without breaking it. The power of the machine should be adjusted well and according to the capacity for continual and efficient working of the machine. It has a U shaped body. Investment cost is low.

- Less space is occupied.
- Power requirement is low.
- Conveyor shaft direct driven by chain gear or belt.
- Maintenance is very easy.
- Long life.

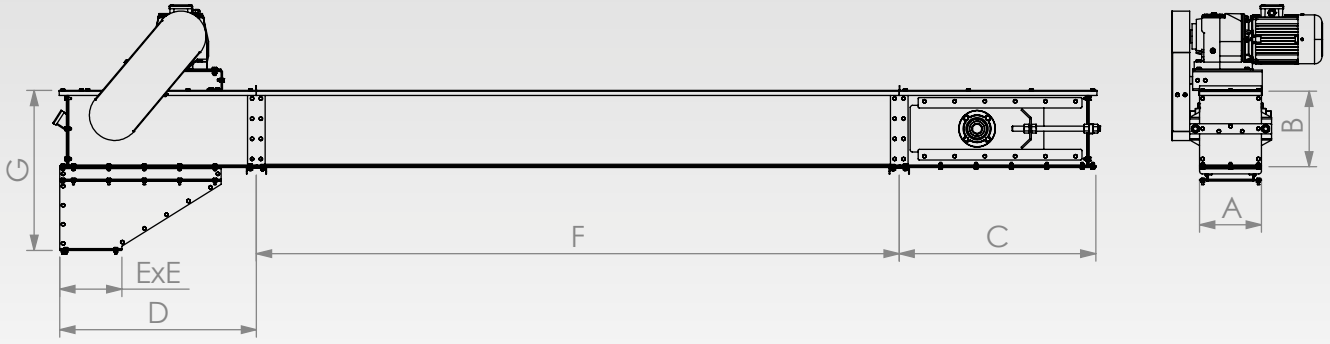


Model	A	B	H	L	D	Z	Kapasite
ÖZ-CC 1630 S	755	755	300	160	-	600-800 1000-1200	32
ÖZ-CC 1630 D					157		30
ÖZ-CC 2730 S				270	-		60
ÖZ-CC 2730 D					159		52
ÖZ-CC 2744 S	805	805	440	270	-		115
ÖZ-CC 2744 D					242		80
ÖZ-CC 3250 S	835	835	500	320	-		152
ÖZ-CC 3250 D					280		107
ÖZ-CC 3660 S	885	885	600	360	-		200
ÖZ-CC 3660 D					303		140





It is used to discharge fluent and hard-fluent products in steel and concrete silos.

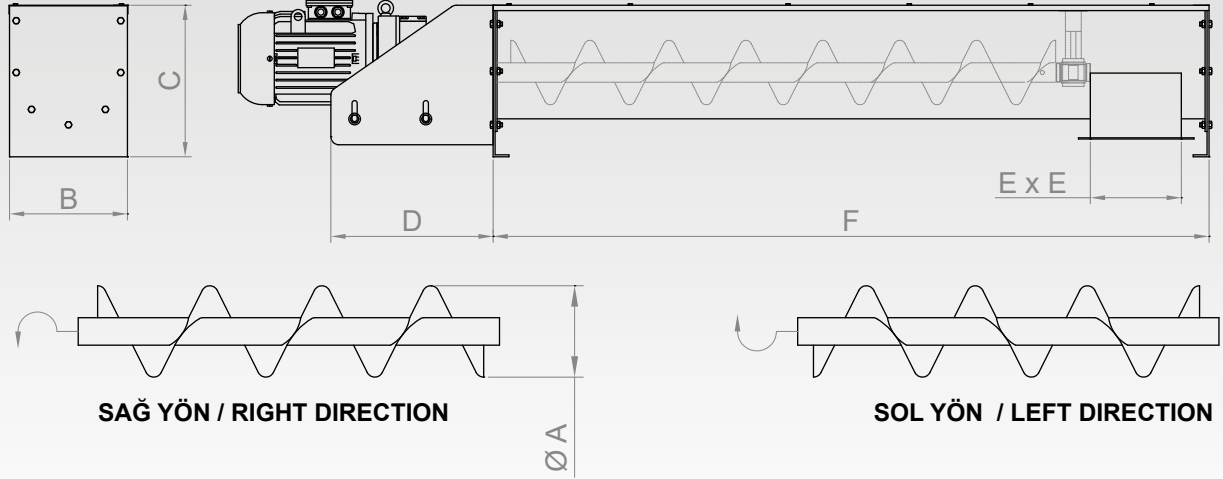


Model	QA	B	C	D	E	FxG	H	S	QM	Kapasite
ÖZ-VH 160	160	180	260	225	280	190x190	160	2	42	20
ÖZ-VH 200	200	220	300	265	320	230x230	200		48	30
ÖZ-VH 250	250	270	350	325	370	280x280	250		60	50
ÖZ-VH 300	300	320	400	375	420	330x330	300		76	70
ÖZ-VH 400	400	420	500	475	520	430x430	400			130





The tube screw conveyor in the transport group is using to transport of very dusty or fine products in grain and legumes factories. Made of metal body. It has the ability to move vertically up to 45 degrees as it moves horizontally.

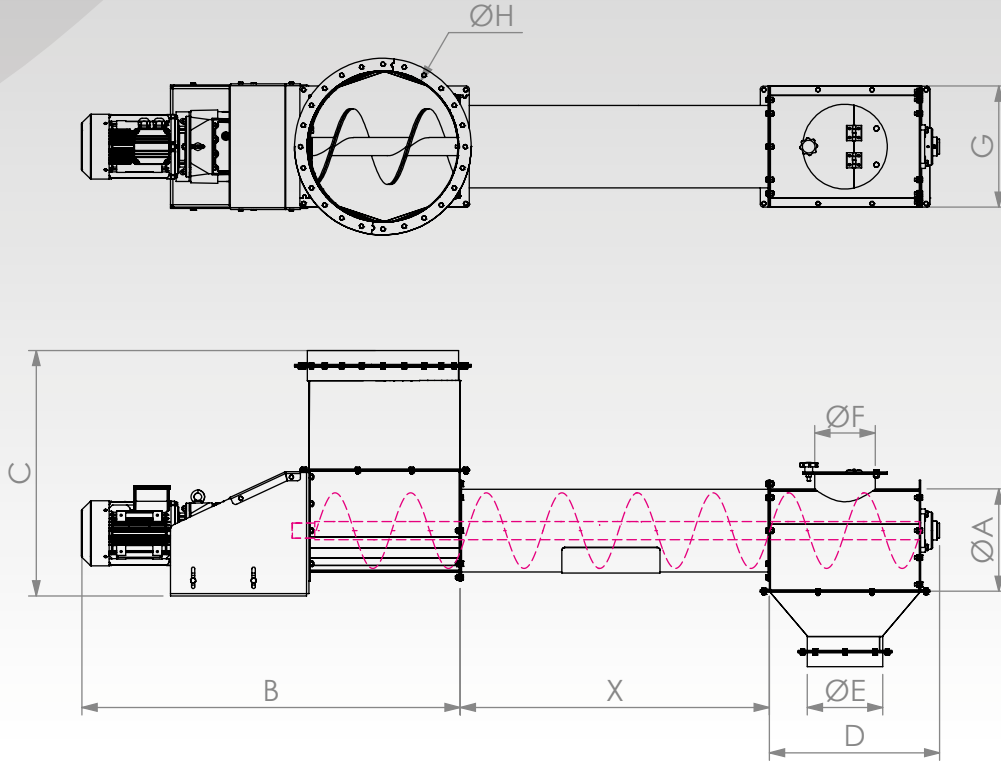



Type	Dimensions (mm)								
	ØA	B	C	D	ØE	ØF	G	ØH	X
ÖZ-SC-180	180	1075	515	405	210	120	600	350	Variable
ÖZ-SC-200	200	1075	515	425	230	120	600	350	
ÖZ-SC-220	220	1075	515	445	250	120	600	400	
ÖZ-SC-250	250	1075	515	475	280	120	600	400	
ÖZ-SC-300	300	1075	540	525	330	120	600	400	



SILO BOŞALTICI (ROTOFLOW)
SILO DISHARGER
РАЗГРУЗИТЕЛЬ ТИПА



It is used to discharge fluent and hard-fluent products in steel and concrete silos.

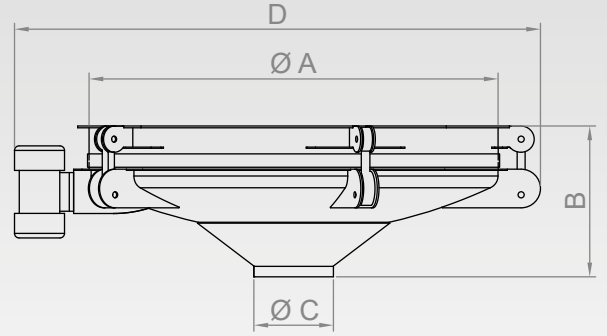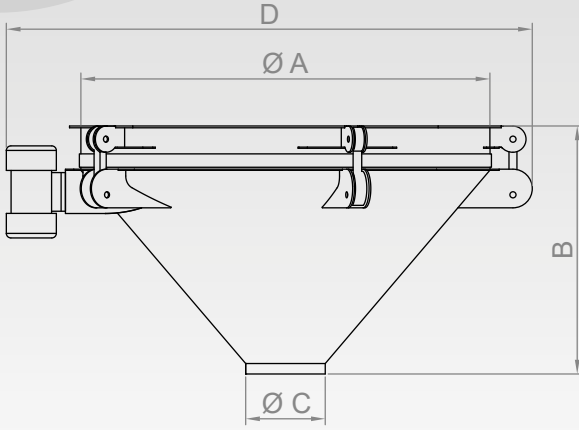


Type	Dimensions (mm)				Motor Power (kw)	Weight (kg)
	A	B	C	D		
ÖZ-SB-60	600	500	150	920	0,12kW 1500rpm	160
ÖZ-SB-100	1000	550	250	1490	0,25kW 1500rpm	260
ÖZ-SB-130	1300	690	350	1790	0,37kW 1500rpm	350
ÖZ-SB-160	1600	790	350	2090	0,55kW 1500rpm	400
ÖZ-SB-180	1800	1090	350	2315	0,75kW 1500rpm	450







Aspirator provides low pressure for conveying systems and grain cleaning machines in grain processing plants to prevent grain dust leakage. The machine, collects dust, straw and light matter from wheat by means of air flow generated inside it and sends it to dust cyclone or filter.

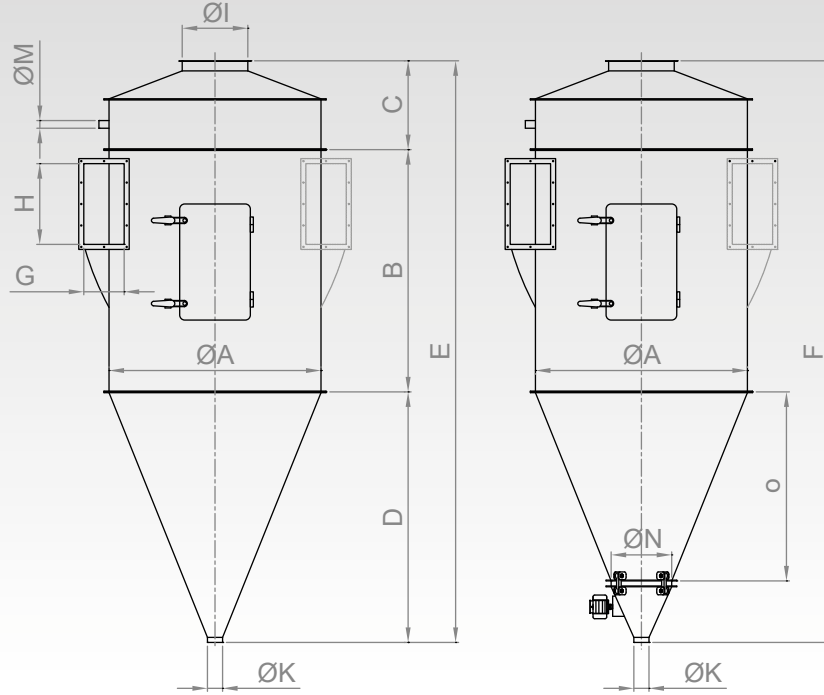



Model	QA	B	C	Torba Boyu	Filtre Alanı	Debi m3/dk	Fan Motoru
ASF-L 6	520	1850	1200	1200	2.8	12	1.1
	600	1900					
ASF-L 9	650	1920			4.2	18	1.5
ASF-L 12	750	2120					
		2530	1600	1600	7.5	35	3
ASF-L 16	850	2130	1200	1200			
		2620	1600	1600			
ASF-L 23	1000	2230	1200	1200	10.6	70	5.5
		2880	1800	1800	16		
ASF-L 26		2230	1200	1200	12	50	4
		2680	1600	1600	16	70	5.5
ASF-L 38	1210	2700			23	100	7.5
		3600	2400	2400			

ÖZ TOZ SİKLONU
DUST CYCLONE
ЦИКЛОН

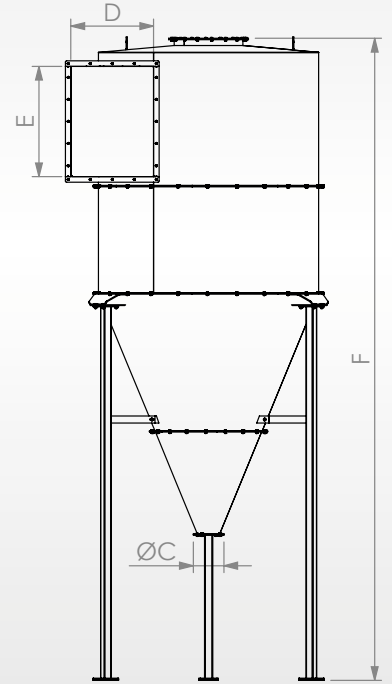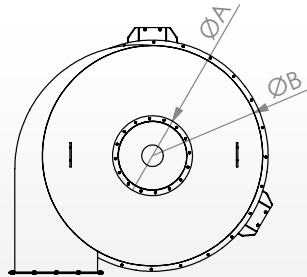

Model	A	B	QC	QD	QE	F	G	H	Hava İhtiyacı m3/dk
ÖZ-DC 85	280	250	350	850	300	1000	800	1800	80
ÖZ-DC 100	400		450	1000	350		1000	2000	110
ÖZ-DC 120	500	400	550	1200	500	1200	1200	2400	215
ÖZ-DC 180	660	500	700	1800	650	1800	1850	3650	430
ÖZ-DC 200	850	550	850	2000	800	2000	2100	4100	660
ÖZ-DC 220	920	650	900	2200	850	2200	2400	4600	800

PİSTONLU YÖN KLAPESİ
LINE DIVERTING GATE
ЛИНИЯ ОТВОДЯЩИЕ ВОРОТА

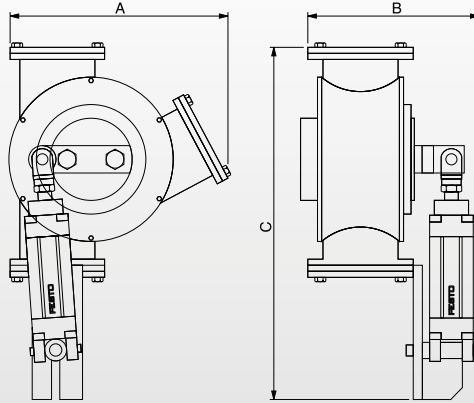
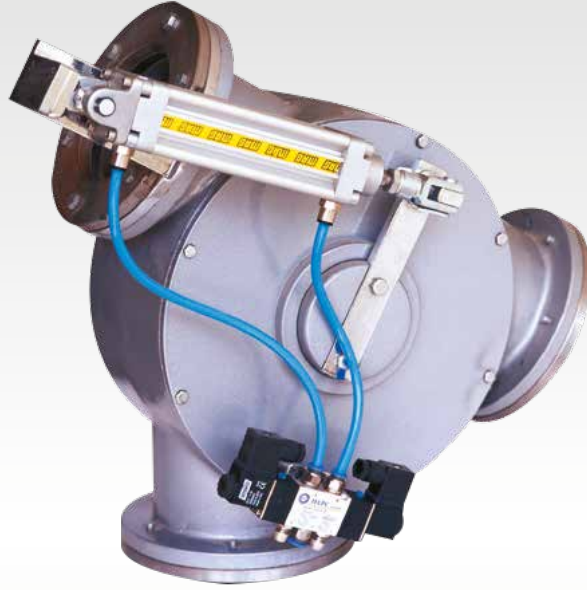


Type	Dimensions (mm)			Weight (kg)
	A	B	C	
ÖZ-YK-50	310	180	410	11
ÖZ-YK-70	320	200	425	13
ÖZ-YK-95	350	225	460	24
ÖZ-YK-120	430	270	565	52
ÖZ-YK-135	510	300	575	70
ÖZ-YK-150	590	345	590	100

öz **ASPIRATÖR**
LOW PRESSURE FAN
ВЕНТИЛЯТОР




Aspirator provides low pressure for conveying systems and grain cleaning machines in grain processing plants to prevent grain dust leakage. The machine, collects dust, straw and light matter from wheat by means of air flow generated inside it and sends it to dust cyclone or filter.

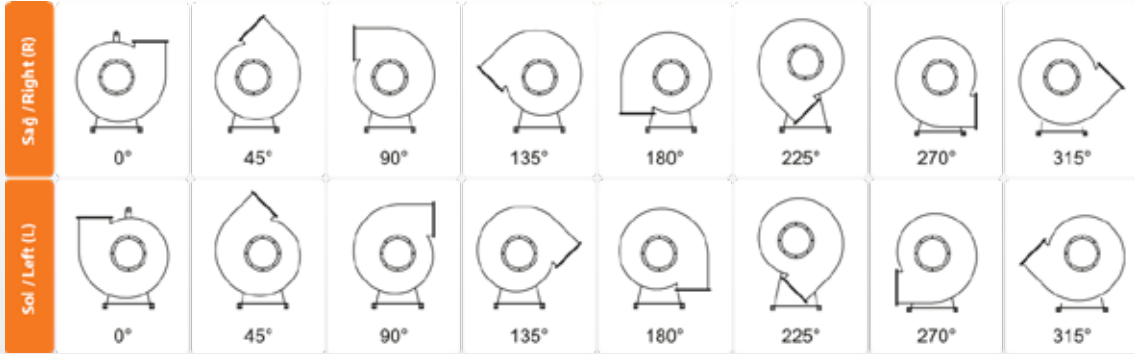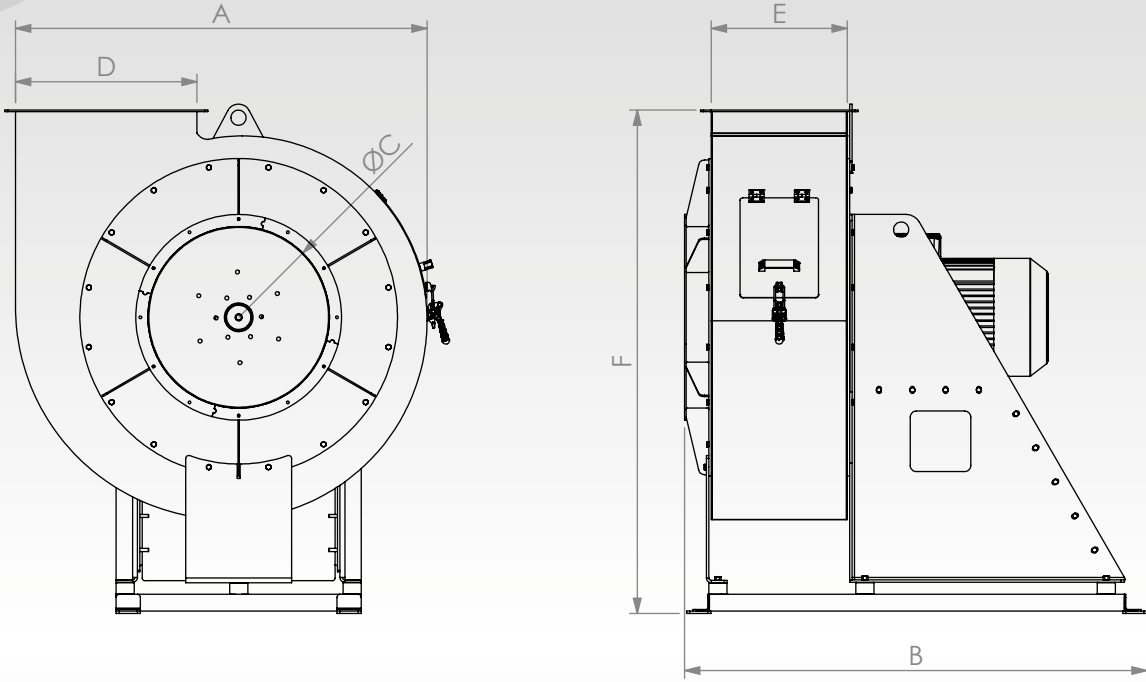


Model	Basınç mmSS	Debi m3/dk
ÖZ-AS 4	250	71
ÖZ-AS 5		79
ÖZ-AS 7		107
ÖZ-AS 11		157
ÖZ-AS 15		214
ÖZ-AS 18		264
ÖZ-AS 22		314
ÖZ-AS 30		428
ÖZ-AS 37		528
ÖZ-AS 45		660
ÖZ-AS 55		800





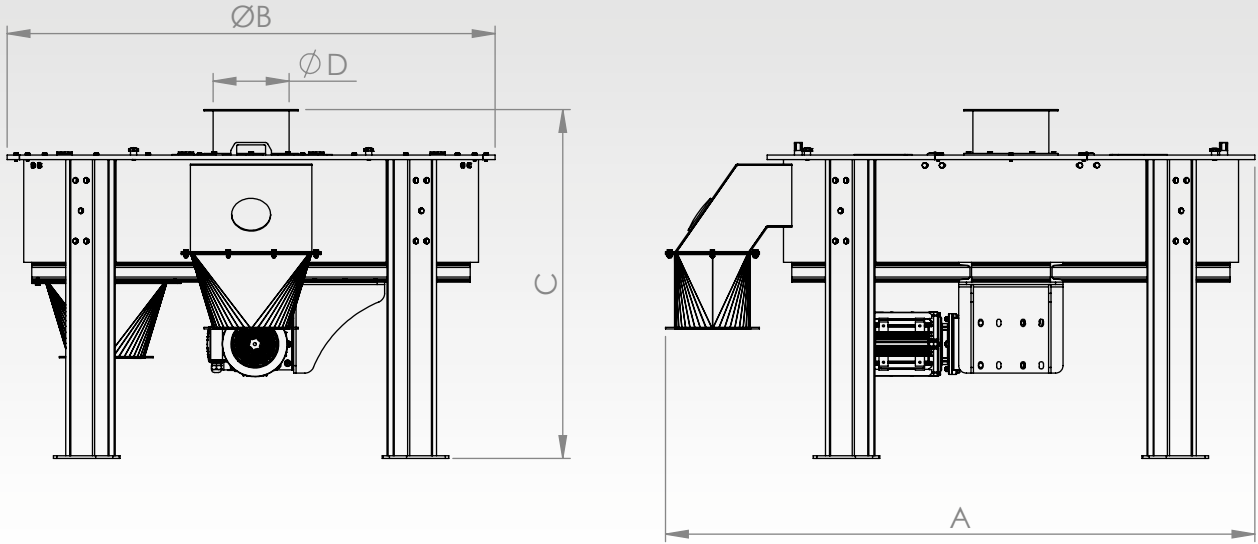

Type	Dimensions (mm)			
	A	ØB	C	ØD
ÖZ-CS-10	2000	1600	1150	250



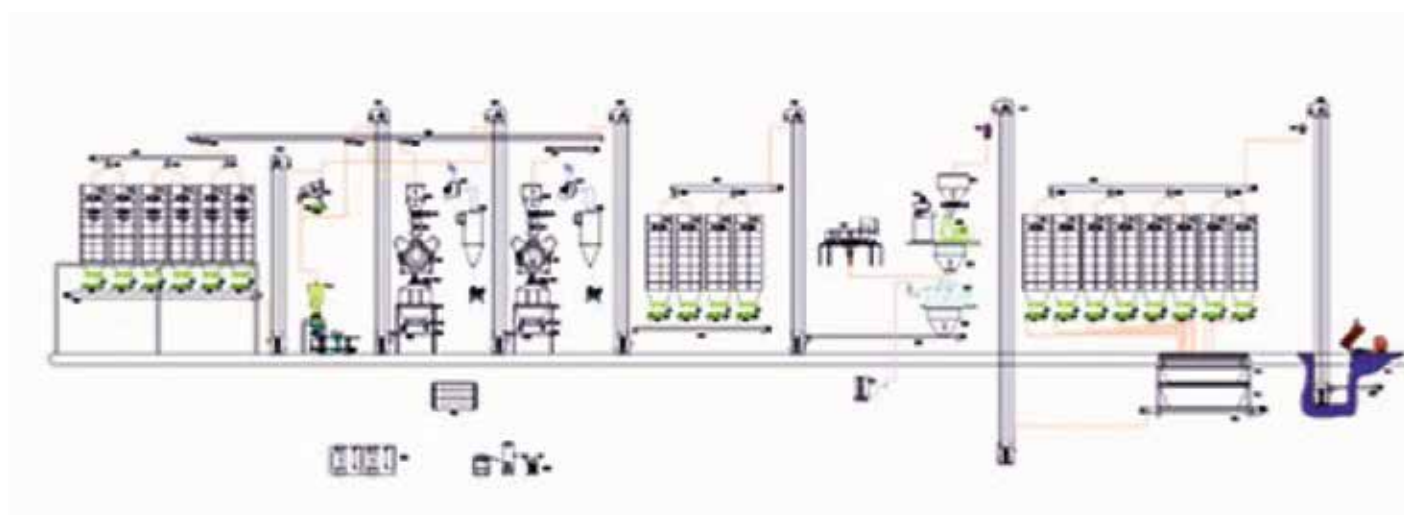

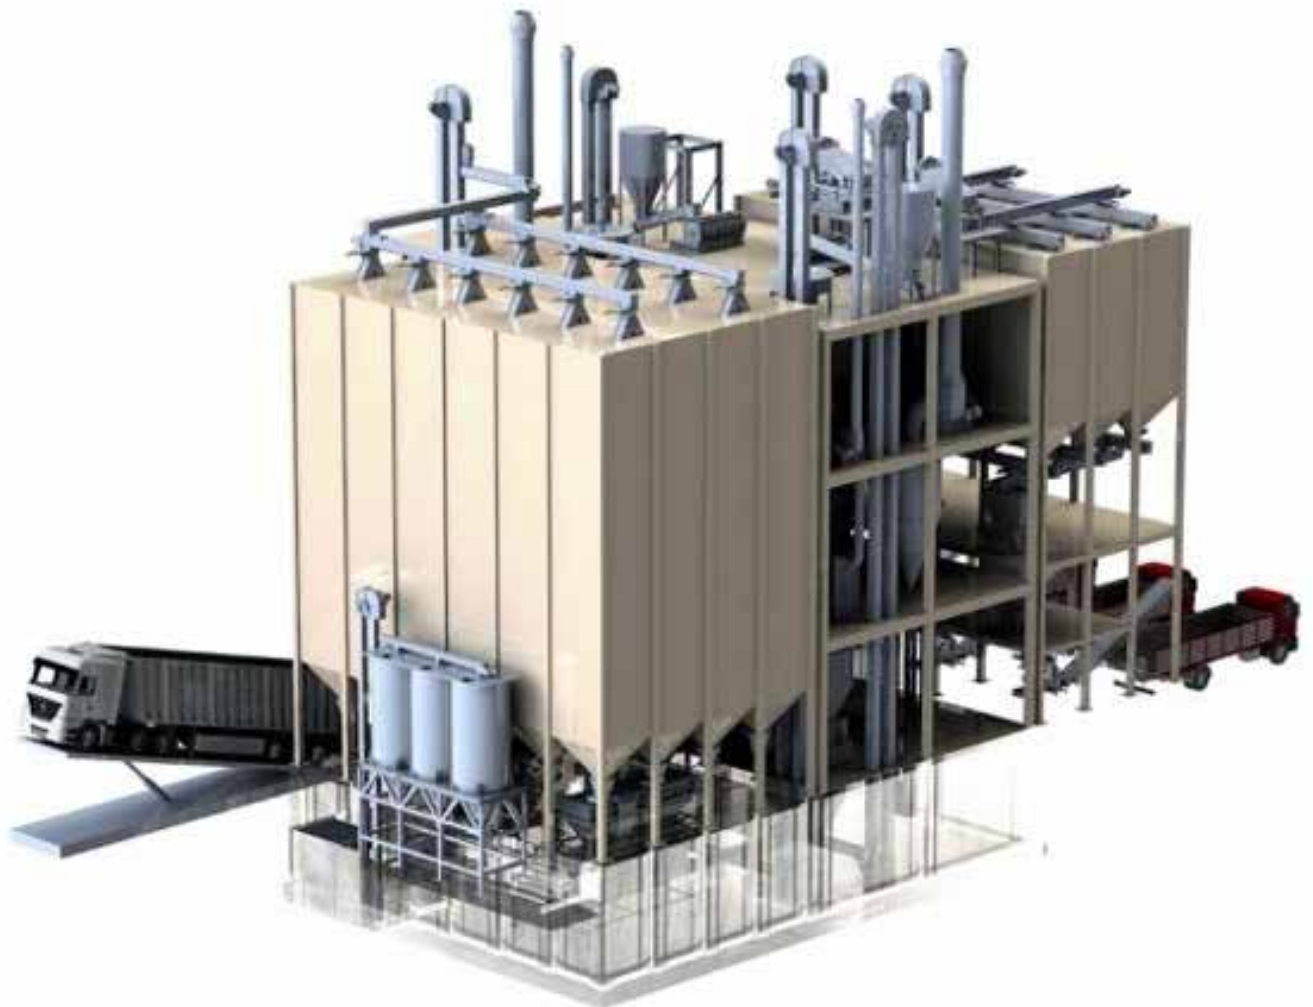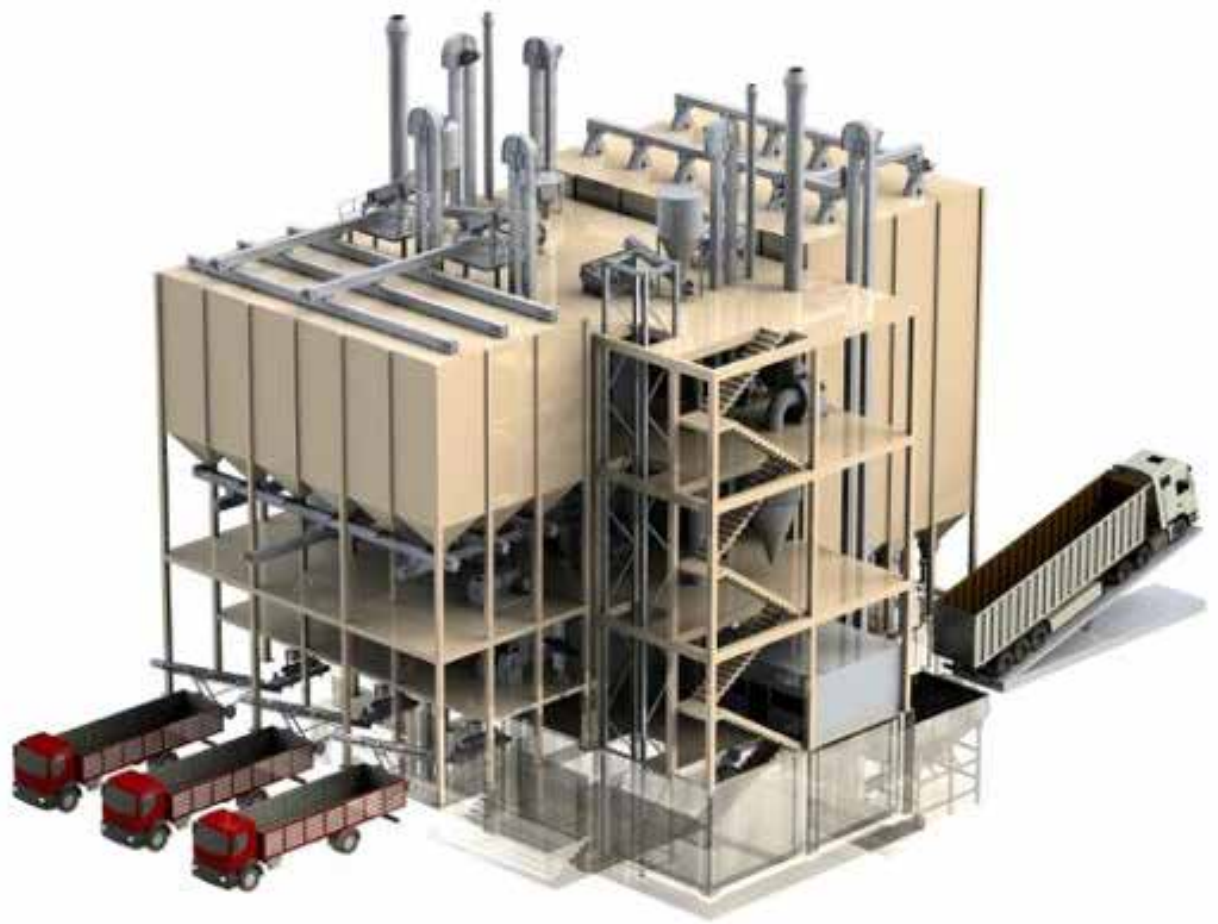







2.Organize Sanayi Bölgesi Büyükkayacık
Mahallesi İkipınar Sokak No: 6
Selçuklu-Konya / Türkiye
Tel : +90 332 346 15 08
ozunmak@ozunmak.com
export@ozunmak.com
www.ozunmak.com

